



Always check the website for the most updated specifications: [www.americh.com](http://www.americh.com)

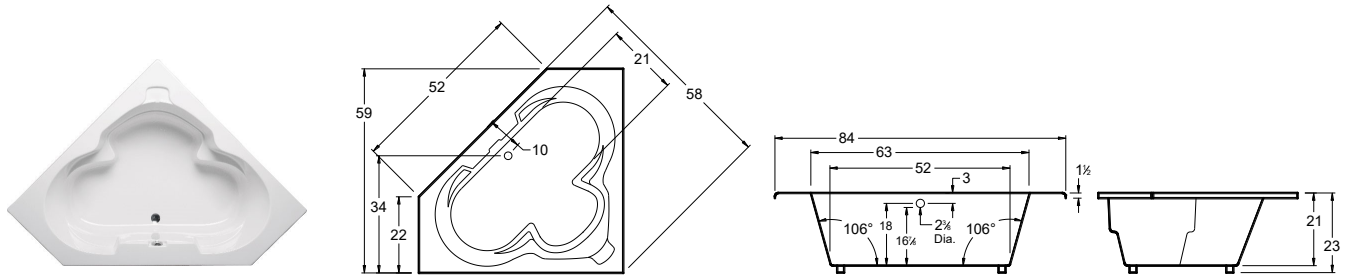


All bathtub dimensions are ± 1/2".


## Builder Series



## Luxury Series




## Platinum Series




## Combination



(pump and blower location only)



## Airbath System II



## Airbath System III

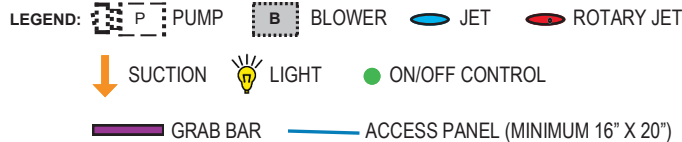

### INSTALLATION TIPS

- Install according to Owner's Manual and local codes. Always consult your local plumber for recommendations.
  - Certain options or altering the pump/blower location may cause the pump/blower to extend beyond the tub decking.
  - Airbath III units may be 1 1/2" – 2 1/2" taller than stated.
  - Hot water supply should be 65-75% of the tub capacity or greater.
  - Cut Dimensions: Americh recommends waiting until the actual unit is received.
  - All specifications are subject to change without notice
- ++ Factory installed aprons on this model may increase the overall height of the tub when ordered with certain accessories (.IE Linear Drain)

### DIMENSIONS

59" x 59" x 23" (1499 x 1499 x 584 mm)  
Whirlpool Operating Gallons = 60 (Liters = 227)  
Gallon to Overflow = 100 (Liters = 379)

**MATERIAL:** Acrylic (All Americh Standard Colors)

**TUB FLOOR:** Textured

**UNDERMOUNT:** No

### ELECTRICAL REQUIREMENTS

Americh recommends one 20 amp ground fault circuit interrupter (GFCI) for each power supply provided with the bathtub.

### STANDARD EQUIPMENT:

- Adjustable Feet
- PVC Waste & Overflow

### OPTIONAL ACCESSORIES

- Bermuda Apron ++
- Chromatherapy\*
- Grab Bars: 9" \* - 14" - 16"
- High Density Insulation\*
- iBath Sound System
- Inline Heater (whirlpool only)
- Jets: Additional or Rotary\*
- Lo Profile Tub Edge
- Ozone System (whirlpool and/or Airbath only)
- Pillows: 12" \*
- Remote Control Upgrade (select series only)
- Serenity Soak (tub only)
- Syllent Pump with Heated Air\*
- Thermal Comfort System (TCS must be at opposite end if used with VSM)
- Tile Flange Kit
- Trim Kit Upgrade\*
- Vibro Sonic Massage (VSM must be at opposite end if used with TCS)
- Waste & Overflow Upgrades
  - Cable Drive Waste & Overflow

\*Standard on Platinum Series

### CODES AND COMPLIANCE

Americh products meet or exceed the following standards:

- Underwriters Laboratories (UL)
- Underwriters Laboratories - Canada (cUL)
- Canadian Standards Association - (CSA)
- ANSI Z124.1 • ANSI A112-19.7
- ANSI A112.19.8 • ASTM F462-79

Contact Americh for additional approvals.

Last Update 01/11/17