AMERICH®

CONCORDE® 7242

Always check the website for the most updated specifications: www.americh.com

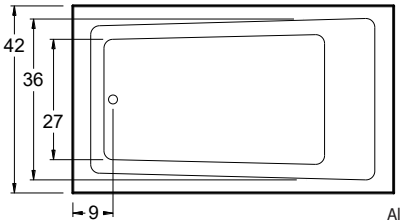

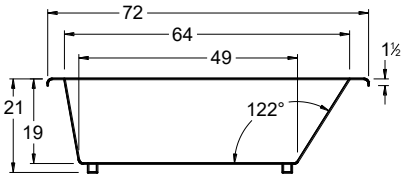



All bathtub dimensions are ± 1/2".

Builder Series



Luxury Series



Platinum Series



Combination

(pump and blower location only)



Airbath System II



Airbath System III



LEGEND: P PUMP | B BLOWER | JET | ROTARY JET | SUCTION | LIGHT | ON/OFF CONTROL | GRAB BAR | ACCESS PANEL (MINIMUM 16" X 20")

Installation Tips

- Install according to Owner's Manual and local codes. Always consult your local plumber for recommendations.
- Certain options or altering the pump/blower location may cause the pump/blower to extend beyond the tub decking.
- Airbath III units may be 1 ½" – 2 ½" taller than stated.
- Hot water supply should be 65-75% of the tub capacity or greater.
- Cut Dimensions: 70"x 34". It is recommended to wait for unit to arrive before cutting.
- All specifications are subject to change without notice.
- The combination of multiple systems and options may require components to stick out and/or be remotely installed in the field.

Dimensions

72" x 42" x 21" (1829 x 1067 x 533 mm)
Whirlpool Operating Gallons = 70 (Liters = 265)
Gallon to Overflow = 105 (Liters = 398)

Material: Acrylic (All Americh Standard Colors)

Tub Floor: Textured

Undermount: Yes

- Advise Americh when ordering to ensure there are no issues with deck mounted controls.
- Always take dimensions directly from the unit.

Electrical Requirements

Americh recommends one 20 amp ground fault circuit interrupter (GFCI) for each power supply provided with the bathtub.

Standard Equipment:

- Adjustable Feet

Optional Accessories

- Apron
  Factory installed aprons may increase the overall height of the tub when ordered with certain accessories (ie. Linear Drain).
- Chromatherapy*
- Grab Bars: 9" *- 14" - 16"
- High Density Insulation*
- iBath Sound System
- Inline Heater (whirlpool only)
- Jets: Additional or Rotary*
- Lo Profile Tub Edge
- Ozone System (whirlpool and/or Airbath only)
- Pillows: Angle* - 12"
- Remote Control Upgrade (select series only)
- Serenity Soak (tub only)
- Syllent Pump with Heated Air*
- Thermal Comfort System (TCS cannot be used with VSM)
- Tile Flange Kit
- Trim Kit Upgrade*
- Vibro Sonic Massage (VSM cannot be used with TCS)
- Waste & Overflows Upgrades
  - Cable Drive Waste & Overflow*
  - PVC Waste & Overflow+
  - Linear Waste & Overflow

(*) Standard on Platinum Series
(+) Standard on Luxury Series

Codes and Compliance

Americh products meet or exceed the following standards:

- Underwriters Laboratories (UL)
- Underwriters Laboratories - Canada (cUL)
- Canadian Standards Association - (CSA)
- ANSI Z124.1 • ANSI A112-19.7
- ANSI A112.19.8

Contact Americh for additional approvals.

Made in USA