

SHAMPOO FIXTURES

HT1 HAIR TRAP

HAIR TRAP INSTALLATION

NOTE: It is the responsibility of the installer and/or the Salon Owner to verify that this device conforms to prevailing local plumbing codes.

CONTENTS



- | | |
|----------------------|-------------------------|
| (1) J-Trap | (1) Strainer and Handle |
| (2) Slip Nuts | (2) 1 1/2" Washers |
| (2) 1 1/4" Adapters | (1) Clean-out Cap |
| (1) Clean-out Washer | |

TO REMOVE OLD DRAIN BEND

1. Unscrew the old slip nuts.
2. Pull down on the old drain bend until it slides free of the tailpiece and drain pipe.


TO INSTALL THE HT1 HAIR TRAP

1. Place the Slip Nuts and Washers over the 1 1/2" tail piece and drain pipes.
2. Install the hair trap onto the tail piece and drain pipe.
3. For 1 1/4" pipe, use the adapter washers included.
4. Hand tighten the Slip Nuts.
5. Run water and check for leaks. Tighten the Slip Nuts as necessary.
Caution: Do NOT overtighten.

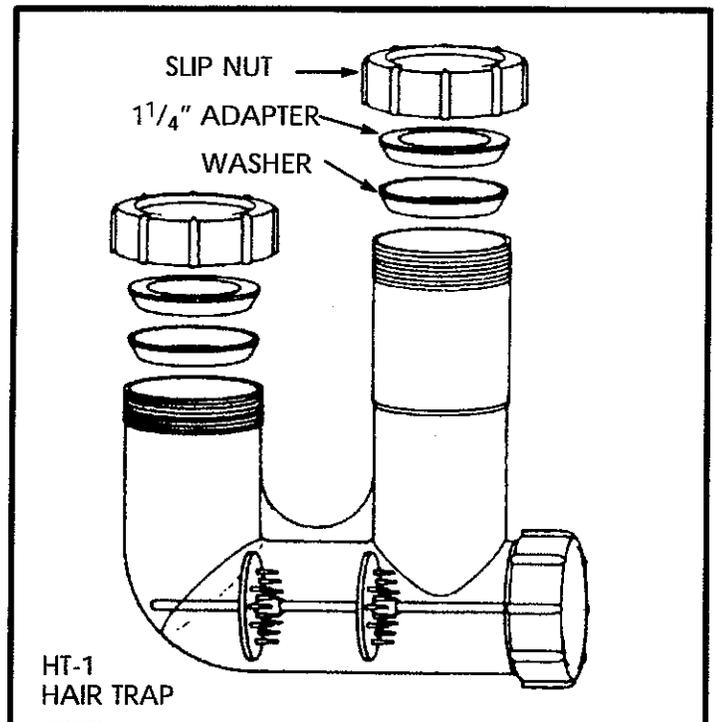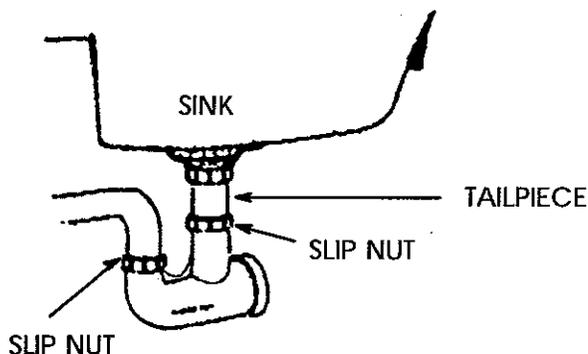

TO CLEAN

1. Unscrew the Clean-out Cap.
2. Pull the Strainer out from the Trap.
3. Remove all debris.
4. Replace the Strainer and the Clean-out Cap.
4. Run water and check for leaks.

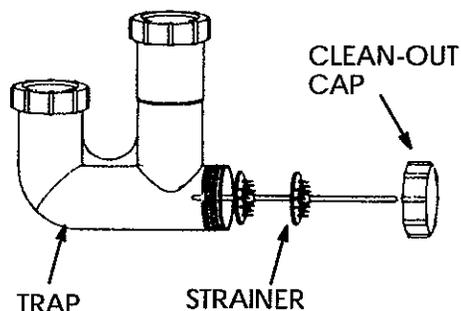

belvedere

Belvedere USA Corporation
A wholly owned subsidiary of The Wella Corporation
One Belvedere Boulevard, Belvedere, Illinois 61008
Printed in U.S.A. 4000949 Rev. 1-01