
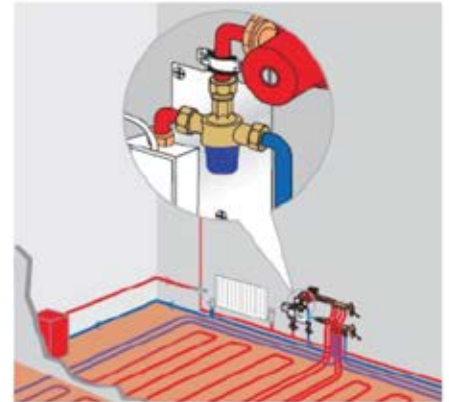


Heatguard® 115 Series

TYPICAL INSTALLATION

To control water temperature at the source of heat (hot water tank) to provide a safe distribution of temperature, or for use in heating systems.

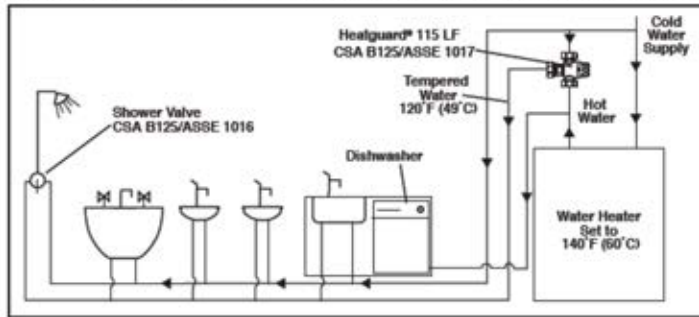


SPECIFICATION DATA

Performance:

Adj. outlet temperature range	85 – 176°F (29 – 80°C)
Temp. hot supply	120 – 180°F (48.9 – 82.2°C)
Temp. cold supply	39 – 80°F (3.9 – 26.7°C)
Maximum pressure	230 psi (1600 kPa)
Flow rate, minimum	2.5 gpm (9.5 l/min)
Flow rate, maximum	27.2 gpm (100 l/min)

Materials:

Body	Bronze
Seals	EPDM
Springs	Stainless Steel
Internal cap	Brass
Piston	Engineered Polymer

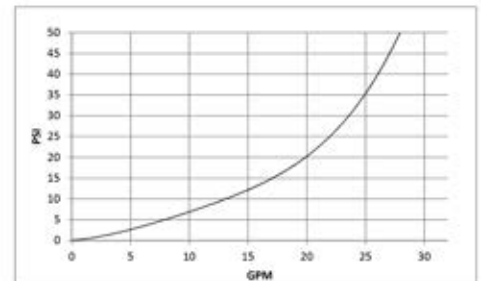

AVAILABLE CONNECTIONS

Sweat	3/4", 1" and 1 1/4"
Threaded (NPT)	3/4" and 1"

CERTIFICATIONS

The Cash Acme Heatguard® 115 LF is certified to ASSE 1017, CSA B125.3, NSF 372, and listed by ASSE and IAPMO for use in accordance with U.S. and Canadian plumbing codes.

