

HC7000v2 Utility Pump Switch

with Automatic Turn On/Off, Hi-Lo Dual Sensors and Built-in Alarms

Overview:

The HydroCheck HC7000v2 Electronic Utility Pump Switch with Automatic Turn On/Off, Hi-Lo Dual Sensors and Built-in Alarms automatically controls the on/off function of any utility pump and only runs the pump when water is present. To ensure maximum water removal, an additional run time can be programmed using the Smart Button that begins once the water has dropped below the Lo-Sensor. See the Troubleshooting section for Smart Button, LED and Alarm specifications. Not rated for outdoor use.


READ PRIOR TO INSTALLATION (How It Works):

The HC7000v2 is designed with an **Additional Run Time** feature that can be programmed using the Smart Button. This feature helps to ensure that the utility pump has pumped to its lowest possible depth by allowing it to run for a designated amount of time after the water has dropped below the lo-sensor. The complete operation works as follows:

1. When both the Hi-Sensor and the Lo-Sensor are detecting water, the HC7000v2 turns on the pump and operates in Hi-Lo Mode where the sensor positions determine how long the pump runs for.
2. When the water level drops below the Lo-Sensor, the HC7000v2 switches to Timed Mode, where the pump is run for an Additional Run Time as programmed using the Smart Button.
3. When the Additional Run Time expires, the HC7000v2 turns the pump off, and waits for the next cycle to begin.

Step-by-Step Installation

Step 1:	Plug the control module (A) into a 3-prong 120 VAC outlet. NOTE: The output will turn on briefly and the LED will illuminate red.
Step 2:	Plug the utility pump power cord (B) into the control module (A) . NOTE: The HC7000v2's output is rated for a maximum of 1 HP and/or 15 Amps at 120 VAC.
Step 3:	Using a provided tie wrap (C) , secure either one of the sensors directly to the utility pump (D) where the pump is intended to turn on. This is the Hi-Sensor (E) .
Step 4:	Using the other provided tie wrap (C) , secure the second sensor directly to the utility pump (D) so that the tip of the sensor is positioned just above the pump's lowest pumping capability*. This is the Lo-Sensor (F) . *Refer to the pump's manual for the exact minimum water level specifications.
Step 5:	Adjust the Additional Run Time by following the Run Time Adjustment steps on Page 2. NOTE: This product defaults to a 5 second Additional Run Time and can be reprogrammed at anytime. See <i>Read Prior to Installation (How It Works)</i> above for more information about this feature.
Step 6:	TEST YOUR INSTALLATION BEFORE LEAVING IT FOR UNATTENDED USE. NOTE: This product will not work if tested in a cup of water. See the Product FAQ page on our website for more information.

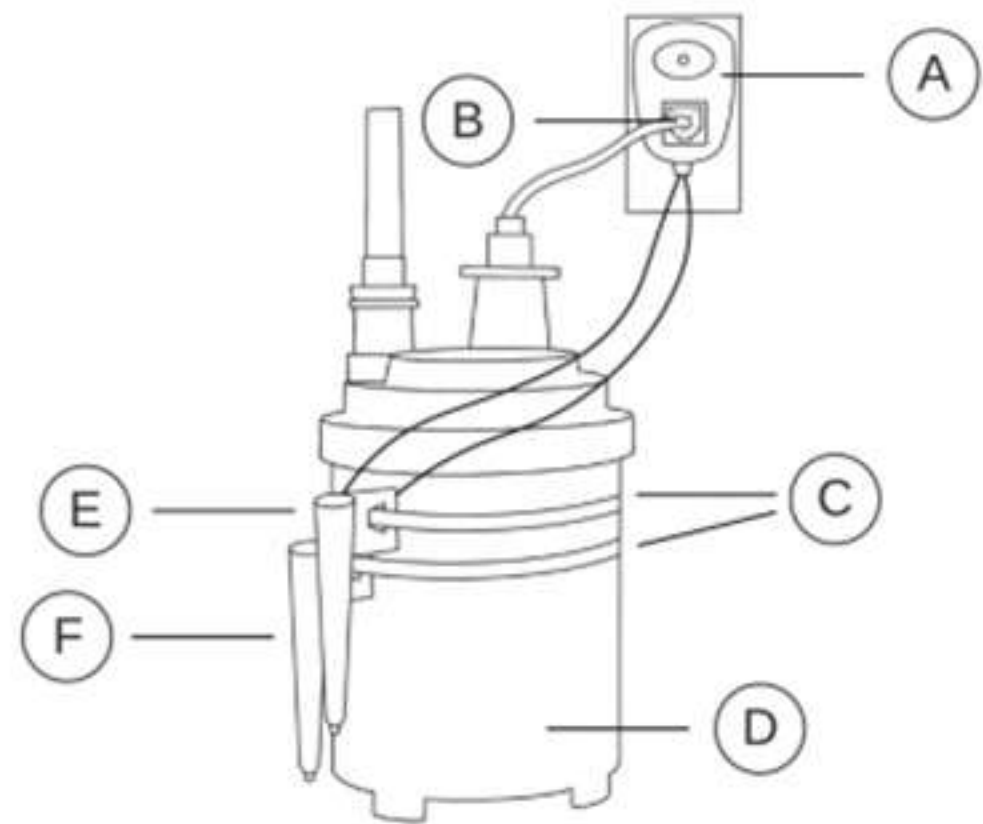

Installation Key

A. Control Module	D. Utility Pump
B. Pump Power Cord	E. Hi-Sensor
C. Tie Wrap	F. Lo-Sensor

Additional Run Time Adjustment

Step 1	Mute any active alarms. There should be no audible alarms when programming the Run Time Adjustment . (See "Alarm Operation" below for more information about muting alarms).
Step 2	Press and hold the Smart Button for approximately 5 seconds, or until the output turns on and the light starts to flash green. The output turning on marks the start of the Additional Run Time . NOTE: If the pump is in the middle of a cycle, first cancel the cycle by pressing and releasing the Smart Button.
Step 3	Release the Smart Button when the desired run time is reached. The output will turn off and the switch is now reprogrammed with the new Additional Run Time . NOTE: Loss of power does not affect programmed run time.

Product Specifications

Product Dimensions	2.8 x 2.5 x 3.5 in
Weight	14.4 oz
Output Rating	120 VAC, 15 Amp, 1 HP
Alarm Rating	80 dB
Power	120 VAC, 60 Hz
Sensor Cable Length	12 ft
Anti-Airlock Cycle	2 Attempts