

**URINAL FIXTURE - 7640-7644 & 7650-7654**

Item: \_\_\_\_\_



Unit may be pictured with some optional features.

- ☐ **7640** 36" Fixture with Back supply connection 3/4" (19mm) MIPT.
- ☐ **7641** 48" Fixture with Back supply connection 3/4" (19mm) MIPT.
- ☐ **7642** 60" Fixture with Back supply connection 3/4" (19mm) MIPT.
- ☐ **7643** 72" Fixture with Back supply connection 1 1/2" (38mm) MIPT.
- ☐ **7644** 96" Fixture with Back supply connection 1 1/2" (38mm) MIPT.
- ☐ **7650** 36" Fixture with Top supply connection 3/4" (19mm) MIPT.
- ☐ **7651** 48" Fixture with Top supply connection 3/4" (19mm) MIPT.
- ☐ **7652** 60" Fixture with Top supply connection 3/4" (19mm) MIPT.
- ☐ **7653** 72" Fixture with Top supply connection 1 1/2" (38mm) MIPT.
- ☐ **7654** 96" Fixture with Top supply connection 1 1/2" (38mm) MIPT.

**STANDARD FEATURES**

- **Front mounted fixture, Wall outlet waste, Washdown urinal**
- High volume beehive style strainer.
- 1 1/2" (38mm) OD P-trap for slip-joint connection.
- Vandal resistant stainless steel trap enclosure.



**WARNING:** Cancer and Reproductive Harm  
- [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

**► DESCRIPTION**

This Urinal Fixture is designed for areas without an accessible pipe chase. The fixtures are fabricated using heavy gauge type 304 stainless steel, welded to form a vandal resistant unit. Flushing provides a sanitary washdown of the interior. Exposed surfaces are polished to a satin finish. Fixtures come with a beehive type strainer, P-trap and vandal resistant stainless steel trap enclosure and vandal resistant fasteners. Wall anchors for fasteners must be furnished by the installer.

**► INSTALLATION**

Flush supply and waste piping must be roughed-in to wall locations provided on drawings. Wall anchors (supplied by others) are installed in wall at locations shown on rough-in drawings. Concealed flush valve requires access for future flush valve service. Fixture is mounted to wall using vandal resistant fasteners provided. Plumbing connections are made when fixture is in place.

Water Consumption:  
See Chart

**RECOMMENDED FLUSH VALVES**

Concealed	SLOAN	ZURN	DELANY	VOLUME
7640, 7641, 7642	613	Z6613	F576	1.5 gpf
7643, 7644	609	Z6609	F547	3.5 gpf
Exposed				
7650, 7651, 7652	186	Z6614	F575	1.5 gpf
7653, 7654	180-T	Z6610	F448	3.5 gpf

## OPTIONS/ACCESSORIES


- ☐ **A168** Metal Template for Wall Openings.
- ☐ **PCC** Powder Coat - Anti-microbial White.
- ☐ **A245** Flush valve thru wall connector  $\frac{3}{4}$ " MIPT. Not available on 7643, 7644, 7653 and 7654.  
Wall Thickness: \_\_\_\_\_
- ☐ **A246** Flush valve thru wall connector  $1\frac{1}{2}$ " MIPT. Not available on 7640, 7641, 7642, 7650, 7651 and 7652.  
Wall Thickness: \_\_\_\_\_
- ☐ **A610** Flush Valve Access Panel. Not available on 7650-7654.
- ☐ **A615** Flush Valve Cover. Not available on 7640-7644.

## URINAL FIXTURE - 7640-7644 & 7650-7654


Item: \_\_\_\_\_

### Notes:

- 1 - Back Supply (7640-7644)
- 2 - Top Supply (7660-7654)

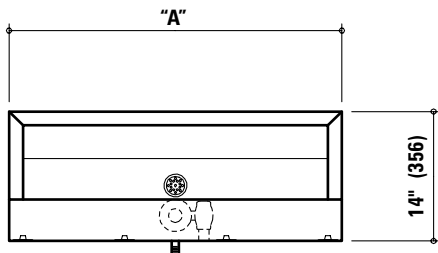

Due to continuous product improvement Metcraft reserves the right to make changes in design and specifications without prior notice. All dimensions should be verified with the factory for current information.

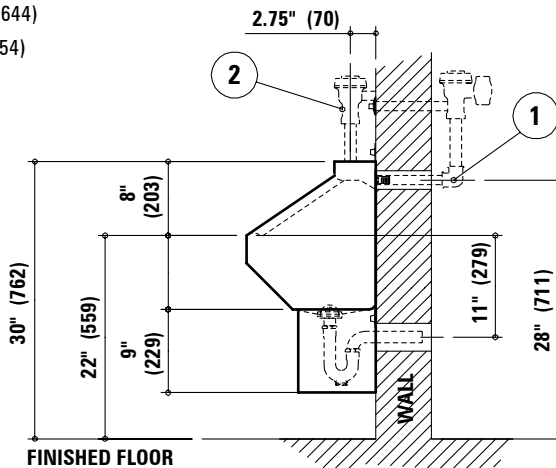

**APPROVED FOR  
MANUFACTURING**

Company: \_\_\_\_\_ Name: \_\_\_\_\_  
Signature: \_\_\_\_\_ Date: \_\_\_\_\_