


## Ambria<sup>™</sup> 60" x 60" x 21 ¼"

## Swirl-way® Whirlpool and Bathtub



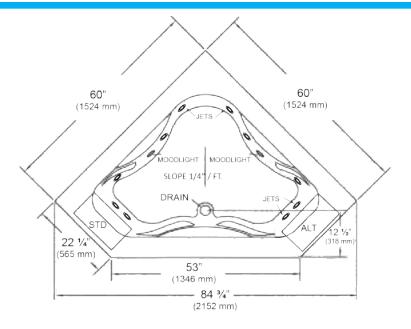



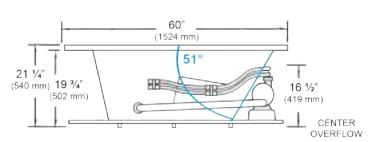

## NOTES

- Pump locations shown for clarity. Specify when ordering STD - Standard or ALT - Alternate.
- 2. Required pump motor access is 20" W x 15" H.
- 3. Measurements may vary 1/4" (+/-)
- If a factory installed nailing flange is added to a unit, add 1/8" to each side flanged.
- 5. Removable apron is not available for this unit.
- 6. These dimensions are nominal and subject to change without notice.

SPECIFICATIONS SPECIFICATIONS			
Specification	Description	Specification	Description
Material	Acrylic, fiberglass reinforced	Warranty	Limited Ten Year
Construction	Self-contained, pre-plumbed whirlpool bath system mounted on a pre-leveled base	Water Capacity	60 gal. (min) 85 gal. (max)
Number of Jets	10	Shipping Weight	Whirlpool - 155 lbs
Floor Loading Weight	47 lbs. / sq.ft.		Bathtub - 135 lbs
ESSENTIALS PACKAGE		COMFORT PACKAGE	
Pump Motor	Single speed induction pump, 13 AMP	Pump Motor	Variable speed induction pump, 13 AMP
On/Off Control	One button on/off electronic keypad	On/Off Control	Multi-function electronic keypad
Electrical Requirements	One 120V, 20 amp GFCI dedicated circuit. Optional heater: separate 120 V, 20 amp dedicated circuit.	Electrical Requirements	Two separate 120 V, 20 amp dedicated circuits







