
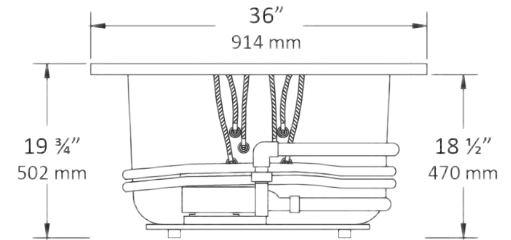



5028/5528

MANSFIELD™

Baywood™ 66" x 36" x 19 3/4"
Swirl-way® Whirlpool and Bathtub

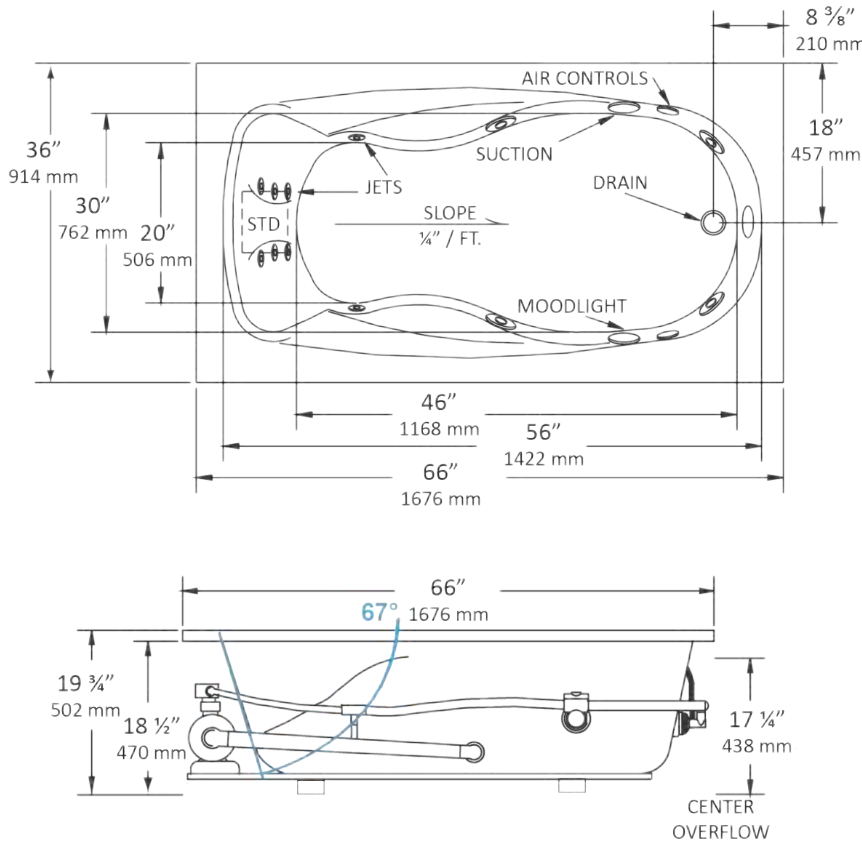

NOTES:

1. Pump location is shown for clarity.
2. Required pump motor access is 20" W x 15" H.
3. Measurements may vary 1/4" (+/-)
4. If a factory installed nailing flange is added to a unit, add 1/8" to each side flanged.
5. Removable apron is available for this unit.
6. These dimensions are nominal and subject to change without notice.

SPECIFICATIONS

| Specification | Description | Specification | Description |
|--------------------------------|---|--------------------------------|---|
| Material | Acrylic, fiberglass reinforced | Warranty | Limited Ten Year |
| Construction | Self-contained, pre-plumbed whirlpool bath system mounted on a pre-leveled base | Water Capacity | 48 gal. (min) 58 gal. (max) |
| Number of Jets | 14 | Shipping Weight | Whirlpool - 165 lbs |
| Floor Loading Weight | 47 lbs. / sq.ft. | | Bathtub - 120 lbs |
| ESSENTIALS PACKAGE | | COMFORT PACKAGE | |
| Pump Motor | Single speed induction pump, 13 AMP | Pump Motor | Variable speed induction pump, 13 AMP |
| On/Off Control | One button on/off electronic keypad | On/Off Control | Multi-function electronic keypad |
| Electrical Requirements | One 120V, 20 amp GFCI dedicated circuit. Optional heater: separate 120 V, 20 amp dedicated circuit. | Electrical Requirements | Two separate 120 V, 20 amp dedicated circuits |

