



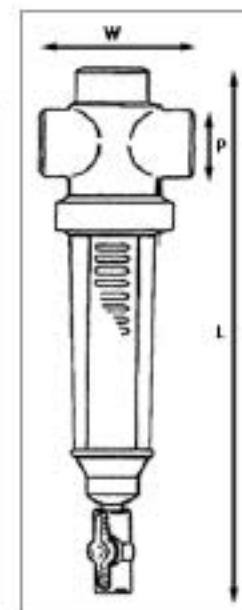

CF Series

Combination Style Screen Filter Features:

- Installs as a 90° "L" or 180° in-line "T" installation.
 - 10-100 GPM models.
 - 1-1/4" plug (supplied) adds versatility to unused outlet.
 - Maximum pressure: 150 PSI @ 73°F.
 - 1/2" MPT drain cleanout with purge valve.
 - Supplied with polyester filter screen.
 - Also available with stainless steel screen as special order.
- **WATER USE ONLY**

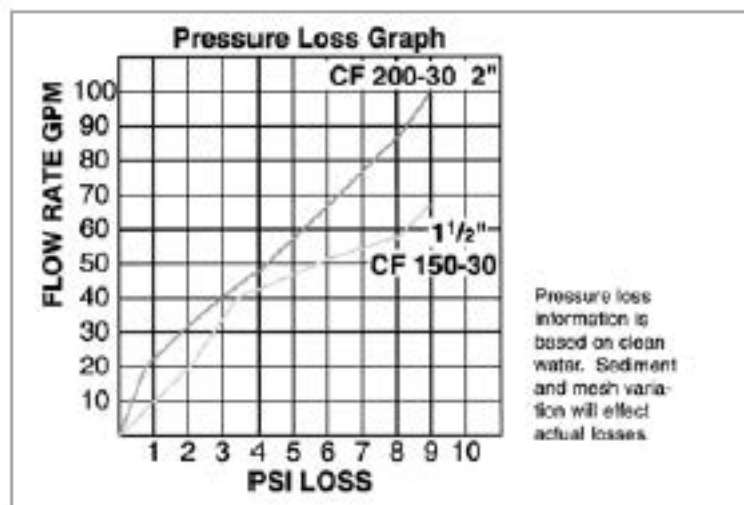

Part Number	Inlet/Outlet "P" Slip x Slip x Slip	Mesh # and Size	Mesh # Opening	Min*/Max Flow GPM	"L"	"W"
CF150-24P	1 1/2"	24 (711 mic)	0.028	10-50	16 5/8"	5 1/4"
CF150-40P	1 1/2"	40 (381 mic)	0.015	10-50	16 5/8"	5 1/4"
CF150-60P	1 1/2"	60 (254 mic)	0.0100	10-50	16 5/8"	5 1/4"
CF150-100P	1 1/2"	100 (152 mic)	0.006	10-50	16 5/8"	5 1/4"
CF150-140P	1 1/2"	140 (104 mic)	0.004	10-50	16 5/8"	5 1/4"
CF150-250P	1 1/2"	250 (61 mic)	0.0024	10-50	16 5/8"	5 1/4"
CF150-500P	1 1/2"	500 (30 mic)	0.0012	10-50	16 5/8"	5 1/4"
CF150-1000P	1 1/2"	1000 (15 mic)	0.0006	10-50	16 5/8"	5 1/4"
CF200-24P	2"	24 (711 mic)	0.028	18-100	18 7/8"	5 1/2"
CF200-40P	2"	40 (381 mic)	0.015	18-100	18 7/8"	5 1/2"
CF200-60P	2"	60 (254 mic)	0.0100	18-100	18 7/8"	5 1/2"
CF200-100P	2"	100 (152 mic)	0.006	18-100	18 7/8"	5 1/2"
CF200-140P	2"	140 (104 mic)	0.004	18-100	18 7/8"	5 1/2"
CF200-250P	2"	250 (61 mic)	0.0024	18-100	18 7/8"	5 1/2"
CF200-500P	2"	500 (30 mic)	0.0012	18-100	18 7/8"	5 1/2"

- Do not use metal valve or fitting on 1/2" drain connection.
- Do not install filters with purge valve on suction side of pump.

* Minimum flow needed for "spin-out" action.