

B27 EUROPEAN TRADITION HYDRONIC TOWEL WARMER

9 W Wds^

Provide MYSON B27 EUROPEAN TRADITION hydronic towel warmer including accessories as scheduled. European Tradition towel warmers are made of 1-1/4" brass tube and fittings in a variety of finishes. The B27 hydronic towel warmer is approved for installation on closed loop hydronic hot water systems only.

Each B27 towel warmer is constructed with integral 3-1/4" diameter wall and floor mounting flanges that are welded onto the back and bottom. The towel warmers are equipped with a manual air vent. Every unit is factory filled, tested and inspected to insure the finest quality product.

3hS[/ST/W8] [eZWe,

Polished Chrome, Polished Nickel, Satin Nickel, Regal Brass, Oil-Rubbed Bronze, White


EfS` VSdV 5a` ` WUffa`s:


2 x internal thread G 1/2" BSP

Maximum positive operating pressure: 77psi Maximum operating temperature: 230° F

Heat Output: 1080 BTUH @ 1550 F **Entering Water Temperature**

I WYZf, 23 lbs.

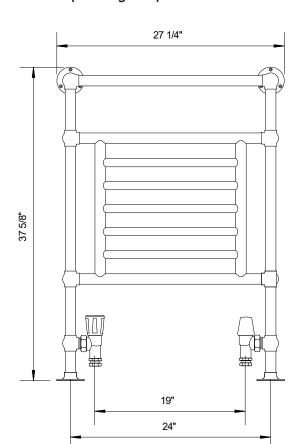







Standard Valve Set - STDVKIT The set includes one (1) FF16WAC adjustable and (1) FF16LAC) non-adjustable ½" valve. Available only with chrome angle body and white handles



Modern Valve Set - V16A "Angle" or V16S "Straight" pattern. Straight valves are normally used when the pipes come from the floor instead of the wall. Available in matching finishes.



Cross Handle Valve Set - CHV16 The set includes two (2) Cross Handle valves . The Cross Handle valves are only available in an angle pattern and are available in matching finishes.



Sleeve Kit - SK16 The set includes two (2) .656" I.D. x 3" brass sleeves and two (2) 2" diameter brass escutcheons. Available in matching finishes.

Optional valves and sleeve kits are recommended and available from MYSON.

SddS`fk,

MYSON European Tradition Towel Warmers are covered by a 10 year warranty.

NOTE: Valve rough-in centers may vary from 181/2" - 19" depending on

valve spud insertion depth.

Quality certificates

CE DIN EN 442 LOOP OZI NA PROJECT NAME: APPROVED DATE: ARCHITECT: ENGINEER: APPROVED SUBMITTED DATE:

